

Model TT-9CW/9CW2

High Speed Pouch Filler/Sealer

- Double pouch action machine for all kind of products.
- Designed in aspect to safety and sanitary.
- New mechanism for easy maintenance.
- Easy operation and cleaning .



Photo of TT-9CW



TOYO JIDOKI CO.,LTD.

Model TT-9CW/9CW2 HIGH SPEED POUCH FILLER/SEALER

Pouch Opening, Solid Filling




A double action motion for stable pouch opening.
Various filling machine can be interlocked.

Liquid Filling



Easy to disassemble for cleaning.
Various type nozzles to comply to your needs.

Machine Dimensions

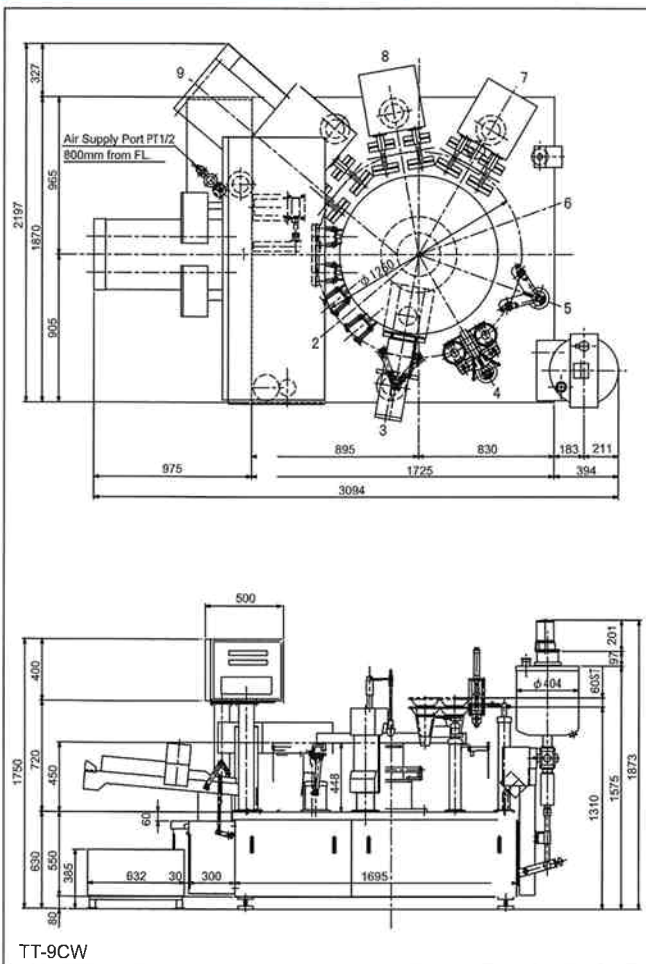

TT-9CW

Specifications and exterior are subject to change without prior notice,
due to continuous efforts made for product improvement.

Machine Specifications

	TT-9CW	TT-9CW2
Capacity	30-100 pouches/min Depending on products	30-60 pouches/min Depending on products
Pouch Size	Width 80-150mm Length 100-250mm	Width 120-180mm Length 150-300mm
Pouch material	Various laminated pouches	
Pouch types	Flat pouch, Stand-up pouch	
Filling product	Various pumps available depending on products	
Filling Range	Standard 50-350cc	
Deaerating	Press type	
Sealing Method	2 Step heat seal, 1 Step seal cooling press	
Electric Power	6kw	
Compressed Air	0.5Mpa 600NL/min	0.5Mpa 800NL/min
Machine Dimension	W2,197 × L3,094 × H1,873mm	W2,715 × L3,301 × H1,923mm
Machine Weight	3,000kg	3,500kg
Accessories	Discharge Conveyor, Vacuum Pump 0.4kw, Funnel, Product Counter, Heater Disconnection Alarm, Pouch Open Detector	
Option	Date Printer, Stand-up Pouch Opening Device, Various Filling Device, Special Liquid Tanks, Agitator, Level Switch, Compressor, Tapping Device, Special Pouch Magazine, Micro Computer Control, Fill Waiting Operation	

Applications

Retorted pouch foods, Precooked foods, Frozen foods, Sauces, Juices, Processed sea food, Liquid detergent, etc.

 **TOYO JIDOKI CO., LTD.** <http://www.tyj.co.jp/>

Head office

POLA Takanawa-Bldg., 7th floor,
18-6, Takanawa 2-chome,
Minato-ku, Tokyo 108-0074, Japan

TEL:(03)5447-2596 FAX:(03)5447-2692