


SEALPAC A-series fully automated tray-sealing units

SEALPAC® A-series

■ standard ▲ optional

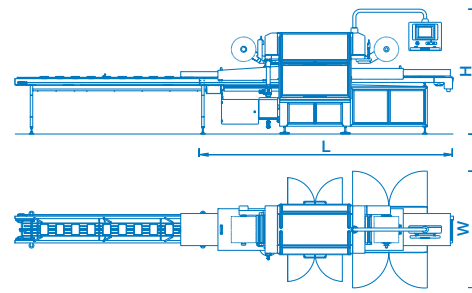

CHARACTERISTICS

	A5	A7	A8	A10
Technical details				
Measurements without conveyor in meters (L H W)	3,2 2,1 1,6	3,8 2,1 1,9	4,4 2,2 2,0	5,0 2,2 2,2
Maximum output ¹⁾ in trays per minute	70	100	140	160
Machine weight ²⁾ in kilograms	1600	1700	2200	3000
Film handling				
Servo controlled film transport	■	■	■	■
SEALPAC InsideCut sealing	■	■	■	■
Film pull-back system	▲	▲	▲	▲
Tandem film unwinder	▲	▲	▲	▲
Tray transport				
Various in-feed systems (all tray types possible)	■	■	■	■
Available in single lane and double lane construction	■	■	■	■
Easy exchange to double lane / single lane	■	■	■	■
Jam protection in stopper area	■	■	■	■
Tip-up conveyor	▲	▲	▲	▲
Easy operation				
Touchscreen panel with 50 programmes	■	■	■	■
Machine can be operated on both sides	■	■	■	■
Tooling can be exchanged on both sides	■	■	■	■
Left and right hand film feeding system	■	■	■	■
Tooling exchange				
Direct power connection without cables	■	■	■	■
Easy gripper exchange system	■	■	■	■
Error-proof ID system between tooling and grippers	■	■	■	■
Pneumatic tooling quick release system; no hand tools required	■	■	■	■
Pneumatic operated tooling trolley	▲	▲	▲	▲
Vacuum / gas				
Separate channels for vacuum and gas	■	■	■	■
SEALPAC MAP+ system	■	■	■	■
Electronic gas mixer	▲	▲	▲	▲
Permanent gas analysis	▲	▲	▲	▲
Communication				
Analog or ISDN modem	■	■	■	■
PDR (Production Data Recording)	▲	▲	▲	▲
Various synchronizations within processing line	▲	▲	▲	▲
Management system	▲	▲	▲	▲
Hygiene / security				
BG-, CE- and GS-certified	■	■	■	■
IP 65 rating	■	■	■	■
Vacuum system can be moist-cleaned	▲	▲	▲	▲
Innovative packaging solutions				
Bestfresh®	▲	▲	▲	▲
Domepack	▲	▲	▲	▲
SealCup	▲	▲	▲	▲
TraySkin	▲	▲	▲	▲

¹⁾ Machine outputs quoted refer to packaging mode vacuum/gas. Outputs are generally higher for sealing only and may vary according to tray format and application.

²⁾ Depending on machine specifications.

All rights reserved for technical modifications. Printed 10/2007. Bestfresh is a registered trademark of SEALPAC GmbH. SealCup and TraySkin are applied for registration by SEALPAC GmbH.

SEALPAC A-series fully automated tray-sealing units

FULLY AUTOMATED TRAY-SEALING UNITS

SEALPAC® A-series

SEALPAC A5 THE COMPACT CLASS

The SEALPAC A5 is the ideal entry-level model for high-tech packaging systems for all types of fresh products. Fully automated, this unit combines all the benefits of the larger models in a compact and space-saving format.



SEALPAC A7 THE ALLROUND CLASS

The SEALPAC A7 stands for innovative flexibility. Today's complex production processes make flexibility your ace card more than ever. The SEALPAC A7 satisfies all needs and is especially suitable for fresh products with varying production runs.



SEALPAC A8 THE PERFORMANCE CLASS

With the SEALPAC A8 performance and quality go hand in hand. The performance class guarantees optimal production standards without quality fluctuations and easy adaptation to high production requirements. All this comes with trouble-free integration in existing production lines.



SEALPAC A10 THE ELITE CLASS

When it comes down to trouble-free, fully automated processing of high capacity production runs, we offer you our easy-to-operate elite class. The SEALPAC A10 provides top performance due to its servo technology and is available in single and double lane construction.



SEALPAC – your package to success.

As a high-precision manufacturer, we support our customers in reaching their targets. We work together to create cost-effective and guaranteed high-quality solutions. Our flexible and dedicated approach will guide you in exploring individual alternatives to help shape your future.

SEALPAC®

Forming Innovations